



COMBINED AMENITY / TRIP RAIL

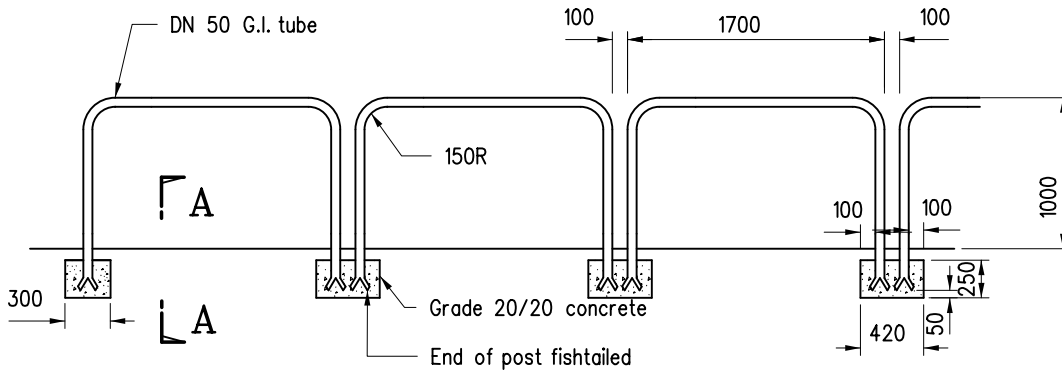

CLOSE SPACED AMENITY RAIL

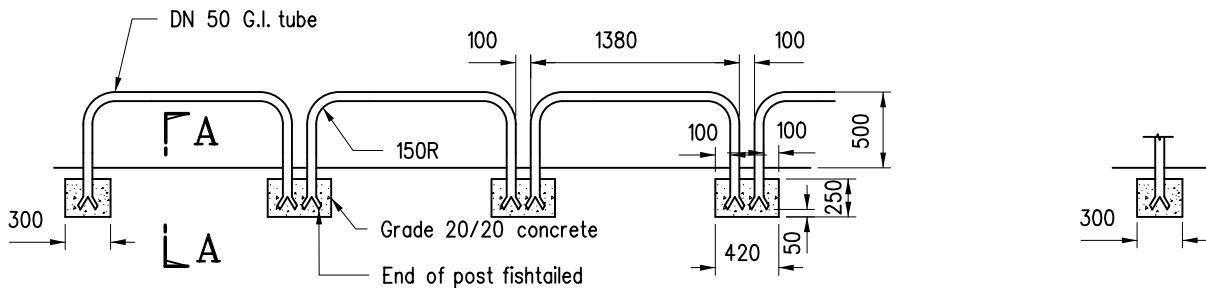

CLOSE SPACED TRIP RAIL

SECTION A - A

Notes:

1. All railing shall be hot dip galvanised to BS EN ISO 1461 : 2022.
2. All dimensions are in millimetres.
3. Where the concrete footing is located in block paved footpath, the footing should be lowered to allow for the paving blocks and the sand course.

C	Note 1 updated	Original Signed	Dec 24
B	Note 1 updated	-	Sep 07
A	Note 3 added	-	Nov 99
	Former Drg. No. H2025/A with general revision	-	Jun 94
REF.	REVISION	SIGNATURE	DATE

**TYPICAL RAILING
COMBINATIONS**

HIGHWAYS DEPARTMENT

REFERENCE

DRAWING No.

CAD

SCALE

1 : 50

H 2138C